LED Digital display lights operating instruction manual

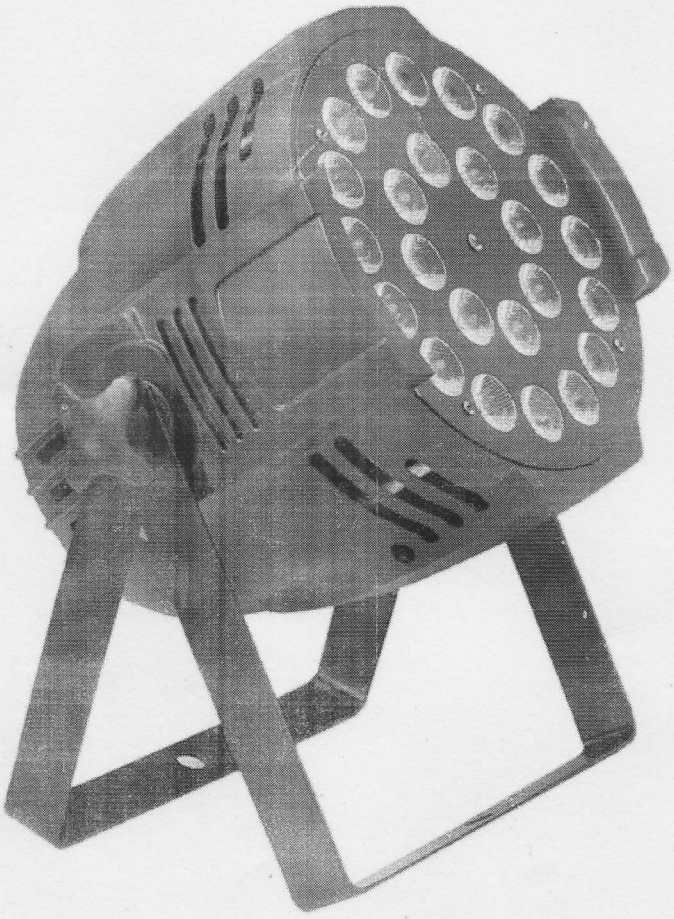

5in1 RGBWY

1. AS PICTURE:

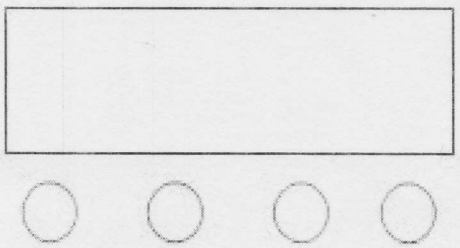

A. Function key
B. Add key
C. Subtract Key
D. Affirm key

A B C D

Operating instructions: Press Key A to get 8 of different function effects.The first 2 number of the digital pipe stand for the present function(see the function table).The last 2 number stand for the parameter of swift code or address code of the Present function.Press B or C to change its parameter,press D to Affirm.

2. LED displayer Function table(Choose the function then press Key"D" to Affirm is ok)

No.	display	Function
1	A001	9CH address code, (001—512) Key B or C to add or reduce the number of address code
2	D001	5CH address code, (001—512) Key B or C to add or reduce the number of address code
3	TB00	7 Color saltus step, (01—99) Key B、C to change the speed of saltus step
4	ZB00	7 Color gradual change, (01—99) Key B、C to change the speed of gradual change
5	ZH00	7 Color compositional change, (01—99) Key B、C to change the speed of compositional change
6	JLBE	7color change by sound control
7	R255	Red color choose, (000—255) Keep B、C to change color
8	G255	Green color choose, (000—255) Keep B、C to change color
9	B255	Blue color choose, (000—255) Keep B、C to change color
10	W255	White color choose, (000—255) Keep B、C to change color
11	Y255	Amber color choose, (000—255) Keep B、C to change color

3. DMX512 9 Channel instruction manual

No.	Function	instruction manual
CH1	Master dimming	R、G、B、W、Y Master dimming, Linear light, From dark to bright
CH2	Master Strobe	R、G、B、W、Y Master Strobe, from slow to fast
CH3	Function choose	0—50: DMX 8channel control; 51——100: Saltus step; 101—150: Gradual change; 151—200: Gradual change; 201—255: sound control
CH4	Function speed	Function speed,from slow to fast
CH5	R dimming	R dimming, Linear light, From dark to bright
CH6	G dimming	G dimming, Linear light, From dark to bright
CH7	B dimming	B dimming, Linear light, From dark to bright
CH8	W dimming	W dimming, Linear light, From dark to bright
CH9	Y dimming	Y dimming, Linear light, From dark to bright

4. DMX512 5 Channel instruction manual

No.	Function	instruction manual
CH1	R dimming	R dimming, Linear light, From dark to bright
CH2	G dimming	G dimming, Linear light, From dark to bright
CH3	B dimming	B dimming, Linear light, From dark to bright
CH4	W dimming	W dimming, Linear light, From dark to bright
CH5	Y dimming	Y dimming, Linear light, From dark to bright

5. Function Feature:

Voltage: 110-240V

Power: 360W

Light source: 24pcs High power 5in1 high brightness lamp bead,Taiwan chip

Function: 1、DMX512, 9/5CH

2、Digital displayer
3、Sound control,Automatic,Strobe
4、Master&slave

5. Function Feature:

Easy Operation ,Humanity Design，Dimming without strobe or shake.Can use for record Video, photograph or television (broadcast) station etc. occasion.